

Calorifier continuous flow system

Consisting of:

- fresh water module TransTherm® aqua FS
- buffer storage tank (option)

Fresh water module TransTherm® aqua FS

Consisting of:

Charging circuit flow:

- ball valve with thermometer handle
- 3-way valve YXG 48
- drive Siemens SAT 61 (0-10 V)
- Stratos pump
- sleeve for cable sensor M10 x 1
- sleeve for AGFW sensor

Charging circuit high temperature return:

- flow rate limiter Hydrocontrol VTR
- test port OVENTROP set 2
- three-way valve YXG 48
- drive Siemens SAT 61 (0-10 V)
- sleeve for cable sensor M10 x 1
- sleeve for AGFW sensor

Charging circuit low temperature return:

- flow rate limiter Hydrocontrol VTR
- test port OVENTROP set 2
- ball valve WESA 1533
- sleeve for cable sensor M10 x 1
- sleeve for AGFW sensor

Heat exchanger supplementary heater:

- plate heat exchanger DANFOSS

Heat exchanger preheater:

- plate heat exchanger DANFOSS

Domestic hot water DHW:

- ball valve OVENTROP Optibal TW
- bimetallic thermometer OVENTROP TW
- sampling valve OVENTROP Aquastrom P (optional)
- ball valve OVENTROP
- sleeve for AGFW sensor

Domestic hot water circulation DHWC:

- flow rate limiter Aquastrom
- sampling valve OVENTROP Aquastrom P
- measurement nozzle OVENTROP
- pump STRATOS P. Z25/1-8 RKA
- non-return valve TS73S
- sleeve for AGFW sensor

Domestic water DW:


- flow rate limiter Aquastrom C
- non-return valve ROSSWEINER
- adapter
- flow rate sensor HUBA
- ball valve OVENTROP
- sleeve for AGFW sensor
- diaphragm safety valve

Control panel control system:

- control panel casing SCHNEIDER
- control TTE-FW
- fuses
- sockets
- terminals

Stand frame:

- frame with corrosion protection coating RAL 9005
- height-adjustable and vibration-damped feet

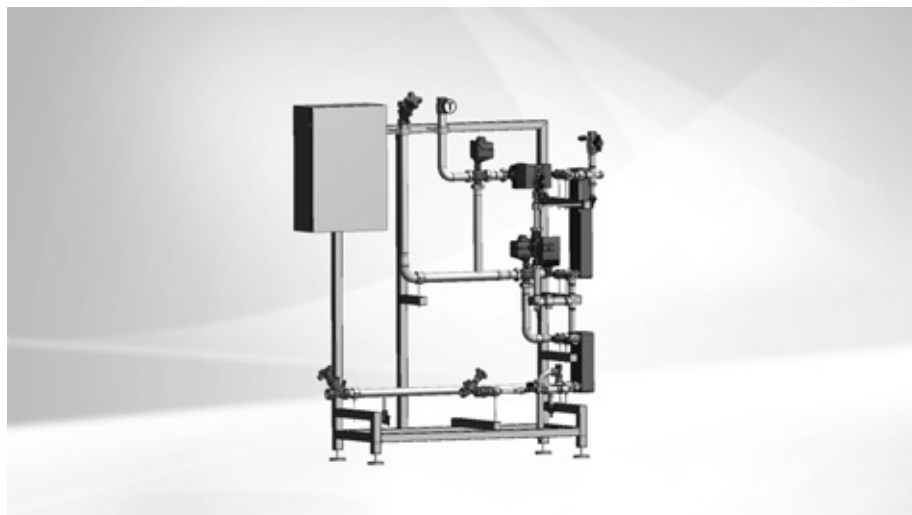

Range

Fresh water module

TransTherm® aqua FS type	Output kW
(7-10)	50
(7-16)	90
(7-20)	130
(7-30)	175
(7-40)	220
(7-50)	275
(7-60)	358
(7-70)	453
(7-80)	569
(7-90)	717

Thermal insulation:

- thermal insulation of the heat exchanger with 30 mm EPP mouldings
- thermal insulation of the pipes with EPP mouldings. insulation thickness of 50 % according to EnEV
- deep black, similar to RAL 9005
- suitable for damp rooms
- CFC-free
- normal flammability according to DIN 4102-1 and EN 13501-1 (fuel class: B2)
- no bleaching or disintegration of the insulation under the influence of UV

Delivery

- The buffer storage tank required is not included in the scope of delivery

On site

- Electrical connection of the controller

Suitable buffer storage tanks
 see separate chapter

TopTronic® E controller

TopTronic® E basic module
District heating/fresh water

- Control unit for controlling district heating systems in non-communicative networks and the corresponding consumers with integrated control functions for
 - primary valve control
 - cascade management
 - 1 heating circuit with mixer
 - 1 heating circuit without mixer
 - 1 hot water charging circuit
 - various additional functions
- Various functions for domestic hot water:
 - selection of different basic programs (week programs, eco mode, holiday, etc.)
 - various operating modes (e.g. accumulator priority or parallel mode)
 - buffer storage circuit on the primary or secondary side
 - adjustable loading criteria (e.g. adjustable loading times, undershooting the minimum nominal value, etc.)
 - adjustable switch-off criteria (e.g. achieving the set value, achieving the lower sensor set value, etc.)
 - adjustable loading block (if the loading flow temperature is too low, the setpoint temperature is not reached, differential temperature-dependent solar circuit control)
- Definable switching times for circulating pump control

- Outdoor sensor
- Immersion sensor (calorifier sensor)
- Contact sensor (flow temperature sensor)
- Complete plug set for district heating module
- Speed-controlled pumps

No further module expansions or controller modules can be installed in the control panel!

Option

TopTronic® E control module

- Simple, intuitive operating concept
- Display of the most important operating states
- Configurable start screen
- Operating mode selection
- Configurable day and week programmes
- Operation of all connected Hoval CAN bus modules
- Commissioning wizard
- Service and maintenance function
- Fault message management
- Analysis function
- Weather display (with HovalConnect option)
- Adaptation of the heating strategy based on the weather forecast (with HovalConnect option)

Notice

The TopTronic® E control module for operating the basic module district heating/fresh water must be ordered separately!

For further information about the TopTronic® E, see "Controls"

Delivery

- Incl. thermometer, non-return valves, cut-off ball valves on the domestic water side
- All fittings required for operation, such as strainers, flow balancing and shut-off valves, non-return valves, air vent and drain valve are fitted

Caution

As a result of thermal disinfection of the domestic hot water for legionella protection, increased water temperatures (at least 65-70 °C) occur. Depending on the water quality, this may result in increased calcification at the installed fittings and heat exchangers and also brings the risk of scalding at the tapping points. Corresponding protective measures must be implemented on site.

Fresh water module



TransTherm® aqua FS

Fully assembled station with 2 plate heat exchangers for the provision of domestic hot water using the continuous flow principle and built-in Hoval TopTronic® E control. The buffer storage tanks required for this are not included in the scope of delivery.

TransTherm® aqua FS	Output kW
(7-10)	50
(7-16)	90
(7-20)	130
(7-30)	175
(7-40)	220
(7-50)	275
(7-60)	358
(7-70)	453
(7-80)	569
(7-90)	717

Part No.

8008 017
8008 018
8008 019
8008 020
8008 021
8008 022
8008 023
8008 024
8008 025
8008 026

Version with copper-free heat exchanger

TransTherm® aqua FS

with copper-free heat exchanger

TransTherm® aqua FS	Output kW
(7-10)	50
(7-16)	90
(7-20)	130
(7-30)	175
(7-40)	220

8008 027
8008 028
8008 029
8008 030
8008 031



TopTronic® E control module black with 4.3" colour touchscreen

For operation of all controller modules connected to the bus system (basic, solar, buffer modules etc.)
 Connection to the Hoval bus system via RJ45 plug connection or via plug terminals (max. 0.75 mm²), flat design with flexible installation option
 Installation:
 - in control panel of the heat generator
 - in the Hoval wall casing
 - in the control panel front, black high-gloss cover, customer-specific configurable start screen,
 Display of current weather or weather forecast (only possible in combination with HovalConnect)

Consisting of:
 - TopTronic® E control module black
 - Clamping device set control module
 - RJ45-RAST 5 CAN cable, L = 500

Part No.

6043 844



Test valve DN 8 G 1/4"
 for TransTherm® aqua L, F, FS
 Test valve suitable for flame treatment for hygienic-microbiologic tests.

2049 861




Sludge separator with magnet MB3/L DN 25...DN 50
 Fast and continuous removal of ferromagnetic and non-magnetic dirt and sludge particles. Sludge separation up to a particle size of 5 µm. Brass housing
 Max. operating pressure: 6 bar
 Max. flow temperature: 110 °C

Type	Connection	Flow rate m ³ /h at 1 m/s flow speed
MB3 DN 25	Rp 1"	2.0
MBL DN 32	Rp 1 1/4"	3.6
MBL DN 40	Rp 1 1/2"	5.0
MBL DN 50	Rp 2"	7.5

2062 165
 2062 166
 2062 167
 2062 168

Additional sludge separators
 see "Various system components"

		Part No.
	Temperature monitor 0...120 °C for TransTherm® aqua L, F, FS	2048 299
	Safety temperature monitor 70...130 °C for TransTherm® aqua L, F, FS	2048 300
	Safety temperature limiter 70...130 °C for TransTherm® aqua L, F, FS	2049 619
	Immersion sleeve G 1/2" stainless steel for thermostat for TransTherm® aqua L, F, FS Installation length = 100 mm Outer Ø: 8 mm, inner Ø: 6.5 mm	2048 285
	Immersion sleeve G 1/2" stainless steel for 2 thermostats for TransTherm® aqua L, F, FS Installation length = 100 mm Outer Ø: 15 mm, inner Ø: 13.5 mm	2048 288

Services



Commissioning

Commissioning by works service or Hoval trained authorised serviceman/company is condition for warranty.

For commissioning and other services please contact your Hoval sales office.

Performance data

TransTherm® aqua FS (7-10 to 7-50)

Domestic water secondary			Heating water temperature flow													
			55 °C (6-...)					60 °C (6-...)								
			(10)	(16)	(20)	(30)	(40)	(50)	(10)	(16)	(20)	(30)	(40)	(50)		
60/5 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-
60/10 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-
60/15 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-
60/20 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-
55/5 °C	T return primary	°C	-	-	-	-	-	-	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	-	-	-	-	-	-	1.25	2.04	2.51	3.71	4.76	5.66	5.66	5.66
	Q max.	kW	-	-	-	-	-	-	43	70	86	127	163	193	193	193
	Ṽ secondary	m³/h	-	-	-	-	-	-	0.74	1.2	1.48	2.18	2.8	3.12	3.69	3.69
55/10 °C	T return primary	°C	-	-	-	-	-	-	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	-	-	-	-	-	-	1.11	2.04	2.51	3.71	4.76	5.63	5.63	5.63
	Q max.	kW	-	-	-	-	-	-	38	70	86	127	163	193	193	193
	Ṽ secondary	m³/h	-	-	-	-	-	-	0.73	1.34	1.64	2.43	3.12	3.69	3.69	3.69
55/15 °C	T return primary	°C	-	-	-	-	-	-	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	-	-	-	-	-	-	0.76	1.46	1.95	3.06	4.23	5.4	5.4	5.4
	Q max.	kW	-	-	-	-	-	-	26	50	67	105	145	185	185	185
	Ṽ secondary	m³/h	-	-	-	-	-	-	0.56	1.08	1.44	2.26	3.12	3.98	3.98	3.98
55/20 °C	T return primary	°C	-	-	-	-	-	-	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	-	-	-	-	-	-	0.47	0.9	1.17	1.9	2.63	3.36	3.36	3.36
	Q max.	kW	-	-	-	-	-	-	16	31	40	65	90	115	115	115
	Ṽ secondary	m³/h	-	-	-	-	-	-	0.39	0.76	0.99	1.6	2.22	2.83	2.83	2.83
50/5 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	1.29	2.03	2.51	3.67	4.72	5.66	1.28	2.04	2.51	3.71	4.76	5.63	5.63	5.63
	Q max.	kW	37	58	72	105	135	162	44	70	86	127	163	193	193	193
	Ṽ secondary	m³/h	0.71	1.11	1.37	2	2.58	3.09	0.84	1.34	1.64	2.43	3.12	3.69	3.69	3.69
50/10 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	1.29	2.03	2.51	3.67	4.72	5.66	1.28	2.04	2.51	3.73	4.81	5.69	5.69	5.69
	Q max.	kW	38	58	72	105	135	162	44	70	86	128	165	195	195	195
	Ṽ secondary	m³/h	0.82	1.25	1.77	2.26	2.9	3.48	0.95	1.51	1.85	2.75	3.55	4.19	4.19	4.19
50/15 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	1.29	2.03	2.51	3.67	4.72	5.66	1.11	1.95	2.48	3.76	4.76	5.69	5.69	5.69
	Q max.	kW	37	58	72	105	135	162	38	67	85	129	163	195	195	195
	Ṽ secondary	m³/h	0.91	1.43	1.77	2.58	3.32	3.99	0.94	1.65	2.09	3.18	4.01	4.8	4.8	4.8
50/20 °C	T return primary	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30
	Ṽ primary	m³/h	1.15	2.03	2.55	3.7	4.75	5.69	0.96	1.69	2.13	3.24	3.63	5.16	5.16	5.16
	Q max.	kW	33	58	73	106	136	163	33	58	73	111	145	177	177	177
	Ṽ secondary	m³/h	0.95	1.67	2.1	3.05	3.91	4.69	0.95	1.67	2.1	3.19	4.17	5.09	5.09	5.09
45/5 °C	T return primary	°C	19	18	18	18	18	17	177	16	16	16	16	15	15	15
	Ṽ primary	m³/h	0.86	1.91	2.9	2.9	3.8	4.61	0.86	1.92	2.91	2.91	3.82	4.63	4.63	4.63
	Q max.	kW	35	80	123	123	162	199	42	95	145	145	192	235	235	235
	Ṽ secondary	m³/h	0.76	1.73	2.65	2.65	3.50	4.27	0.90	2.05	3.13	3.13	4.14	5.05	5.05	5.05
45/10 °C	T return primary	°C	21	21	20	20	20	20	20	19	19	19	18	18	18	18
	Ṽ primary	m³/h	0.86	1.91	2.89	2.89	3.81	4.62	0.86	1.92	2.84	2.84	3.63	4.32	4.32	4.32
	Q max.	kW	33	74	114	114	151	185	39	89	133	133	172	207	207	207
	Ṽ secondary	m³/h	0.81	1.84	2.81	2.81	3.74	4.56	0.97	2.20	3.29	3.29	4.25	5.09	5.09	5.09
45/15 °C	T return primary	°C	24	23	23	23	23	23	23	22	21	21	21	21	21	21
	Ṽ primary	m³/h	0.86	1.91	2.91	2.91	3.81	4.62	0.87	1.8	2.61	2.61	3.33	3.98	3.98	3.98
	Q max.	kW	30	69	106	106	139	170	37	78	115	115	148	178	178	178
	Ṽ secondary	m³/h	0.88	1.99	3.05	3.05	4.02	4.90	1.07	2.26	3.31	3.31	4.26	5.12	5.12	5.12
45/20 °C	T return primary	°C	27	26	26	26	26	26	25	25	24	24	24	24	24	24
	Ṽ primary	m³/h	0.86	1.92	2.91	2.91	3.71	4.41	0.85	1.63	2.36	2.36	3.02	3.61	3.61	3.61
	Q max.	kW	27	63	96	96	124	148	33	65	96	96	123	148	148	148
	Ṽ secondary	m³/h	0.96	2.18	3.33	3.33	4.28	5.13	1.16	2.27	3.32	3.32	4.28	5.14	5.14	5.14

T return primary °C Temperature primary return
 Ṽ primary m³/h Flow rate primary
 Q max. kW Output
 Ṽ secondary m³/h Flow rate secondary

The specified technical data relate to the full load of the module in each case.

Performance data

TransTherm® aqua FS (7-60 to 7-90)

Domestic water secondary	TransTherm® aqua FS	Heating water temperature flow																
		52 °C				55 °C				60 °C								
		(60)	(70)	(80)	(90)	(60)	(70)	(80)	(90)	(60)	(70)	(80)	(90)					
60/5 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
60/10 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
60/15 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
60/20 °C	T return primary	°C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Q max.	kW	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
55/5 °C	T return primary	°C	-	-	-	-	-	-	-	-	28	28	28	27				
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	7.27	10.06	12.62	15.81				
	Q max.	kW	-	-	-	-	-	-	-	-	270	370	470	600				
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	4.68	6.42	8.15	10.4				
55/10 °C	T return primary	°C	-	-	-	-	-	-	-	-	30	29	29	29				
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	7.30	9.04	11.82	14.63				
	Q max.	kW	-	-	-	-	-	-	-	-	255	320	420	530				
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	4.91	6.17	8.09	10.21				
55/15 °C	T return primary	°C	-	-	-	-	-	-	-	-	30	30	30	30				
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	5.20	7.23	9.25	13.01				
	Q max.	kW	-	-	-	-	-	-	-	-	180	250	320	450				
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	3.90	5.42	6.94	9.75				
55/20 °C	T return primary	°C	-	-	-	-	-	-	-	-	30	30	30	30				
	Ṽ primary	m³/h	-	-	-	-	-	-	-	-	3.18	4.34	5.78	7.51				
	Q max.	kW	-	-	-	-	-	-	-	-	110	150	200	260				
	Ṽ secondary	m³/h	-	-	-	-	-	-	-	-	2.73	3.72	4.95	6.44				
50/5 °C	T return primary	°C	-	-	-	-	25	25	25	24	22	22	21	21				
	Ṽ primary	m³/h	-	-	-	-	7.32	8.93	11.59	14.69	7.17	9.14	11.65	13.93				
	Q max.	kW	-	-	-	-	250	310	405	520	315	405	520	630				
	Ṽ secondary	m³/h	-	-	-	-	4.82	5.97	7.80	10.02	6.07	7.80	10.02	12.14				
50/10 °C	T return primary	°C	-	-	-	-	27	27	27	26	24	24	24	23				
	Ṽ primary	m³/h	-	-	-	-	7.17	8.95	11.64	14.45	6.78	8.62	11.52	13.16				
	Q max.	kW	-	-	-	-	230	290	380	480	280	360	485	560				
	Ṽ secondary	m³/h	-	-	-	-	4.99	6.29	8.24	10.4	6.07	7.80	10.51	12.14				
50/15 °C	T return primary	°C	-	-	-	-	29	29	29	28	26	26	26	26				
	Ṽ primary	m³/h	-	-	-	-	7.25	9.24	11.63	14.5	6.31	8.10	10.97	12.35				
	Q max.	kW	-	-	-	-	215	275	350	445	245	315	430	490				
	Ṽ secondary	m³/h	-	-	-	-	5.33	6.81	8.67	11.02	6.07	7.80	10.65	12.14				
50/20 °C	T return primary	°C	-	-	-	-	30	30	30	30	30	29	29	29				
	Ṽ primary	m³/h	-	-	-	-	5.03	6.59	9.02	11.96	6.00	7.6	10.35	11.6				
	Q max.	kW	-	-	-	-	145	190	260	345	210	270	370	420				
	Ṽ secondary	m³/h	-	-	-	-	4.20	5.49	7.51	9.97	6.07	7.80	10.69	12.14				
45/5 °C	T return primary	°C	21	21	21	20	20	19	19	19	18	18	18	17				
	Ṽ primary	m³/h	7.20	8.95	11.53	14.54	6.90	8.77	11.62	13.4	5.77	7.36	10.00	11.26				
	Q max.	kW	255	320	415	530	280	360	480	560	280	360	490	560				
	Ṽ secondary	m³/h	5.53	6.94	9.00	11.50	6.07	7.80	10.4	12.14	6.07	7.80	10.62	12.14				
45/10 °C	T return primary	°C	23	23	23	23	22	22	22	21	20	20	20	19				
	Ṽ primary	m³/h	7.12	9.21	11.51	14.45	6.44	8.23	11.13	12.57	5.36	6.86	9.27	7.24				
	Q max.	kW	235	305	385	490	245	315	430	490	245	315	430	490				
	Ṽ secondary	m³/h	5.82	7.56	9.54	12.14	6.07	7.80	10.65	12.14	6.07	7.80	10.65	12.14				
45/15 °C	T return primary	°C	25	25	25	25	25	24	24	24	23	22	22	22				
	Ṽ primary	m³/h	6.10	8.03	10.67	13.49	6.01	7.63	10.38	11.63	4.88	6.23	8.51	9.53				
	Q max.	kW	190	250	335	420	210	270	370	420	210	270	370	420				
	Ṽ secondary	m³/h	5.49	7.23	9.68	12.14	6.07	7.80	10.69	12.14	6.07	7.80	10.69	12.14				
45/20 °C	T return primary	°C	25	25	25	25	27	27	27	27	25	25	25	25				
	Ṽ primary	m³/h	2.73	3.53	4.66	6.42	5.46	6.97	9.57	10.65	4.37	5.59	7.68	8.57				
	Q max.	kW	85	110	145	200	175	225	310	350	175	225	310	350				
	Ṽ secondary	m³/h	2.95	3.82	5.03	6.94	6.07	7.80	10.75	12.14	6.07	7.80	10.75	12.14				

T return primary °C Temperature primary return
 Ṽ primary m³/h Flow rate primary
 Q max. kW Output
 Ṽ secondary m³/h Flow rate secondary
 The specified technical data relate to the full load of the module in each case.

Performance data


TransTherm® aqua FS (7-60 to 7-90)

Domestic water secondary			Heating water temperature flow							
			65 °C				70 °C			
			(60)	(70)	(80)	(90)	(60)	(70)	(80)	(90)
60/5 °C	T return primary	°C	30	30	30	29	26	26	25	25
	V primary	m³/h	7.15	9.17	11.72	14.69	7.42	9.40	11.80	14.64
	Q max.	kW	290	370	480	610	375	480	549	760
	V secondary	m³/h	4.57	5.83	7.57	9.62	5.91	7.57	9.44	11.98
60/10 °C	T return primary	°C	30	30	30	30	28	28	28	27
	V primary	m³/h	5.45	6.94	9.41	12.88	7.23	9.29	12.23	15.42
	Q max.	kW	220	280	380	520	358	453	569	717
	V secondary	m³/h	3.82	4.86	6.59	9.02	6.16	7.80	9.79	12.14
60/15 °C	T return primary	°C	30	30	30	30	30	30	30	30
	V primary	m³/h	3.72	4.83	6.44	8.67	6.72	8.78	11.73	13.49
	Q max.	kW	150	195	260	350	310	405	540	630
	V secondary	m³/h	2.89	3.76	5.01	6.74	5.97	7.80	10.4	12.14
60/20 °C	T return primary	°C	30	30	30	30	30	30	30	30
	V primary	m³/h	2.11	2.85	3.72	4.95	4.34	5.64	7.37	9.97
	Q max.	kW	85	115	150	200	200	260	340	460
	V secondary	m³/h	1.84	2.49	3.25	4.34	4.34	5.64	7.37	9.97
55/5 °C	T return primary	°C	24	24	23	23	22	21	21	21
	V primary	m³/h	7.42	9.24	11.64	14.38	6.30	8.03	10.99	12.26
	Q max.	kW	350	440	560	700	350	450	620	700
	V secondary	m³/h	6.07	7.63	9.71	12.14	6.07	7.80	10.75	12.14
55/10 °C	T return primary	°C	26	26	26	25	24	24	24	23
	V primary	m³/h	7.06	8.96	11.66	13.66	5.96	7.6	10.25	11.6
	Q max.	kW	315	405	530	630	315	405	550	630
	V secondary	m³/h	6.07	7.80	10.21	12.14	6.07	7.80	10.6	12.14
55/15 °C	T return primary	°C	29	28	28	27	27	26	26	26
	V primary	m³/h	6.67	8.48	11.48	12.91	5.62	7.16	9.70	10.96
	Q max.	kW	280	360	490	560	280	360	490	560
	V secondary	m³/h	6.07	7.80	10.62	12.14	6.07	7.80	10.62	12.14
55/20 °C	T return primary	°C	30	30	30	30	29	29	29	28
	V primary	m³/h	5.95	7.80	10.4	12.14	5.13	6.64	9.01	10.16
	Q max.	kW	240	315	420	490	245	315	430	490
	V secondary	m³/h	5.95	7.80	10.4	12.14	6.07	7.80	10.65	12.14
50/5 °C	T return primary	°C	20	20	19	19	18	18	17	17
	V primary	m³/h	6.06	7.72	10.43	11.77	5.30	6.74	9.05	10.27
	Q max.	kW	315	405	550	630	315	405	550	630
	V secondary	m³/h	6.07	7.80	10.6	12.14	6.07	7.80	10.6	12.14
50/10 °C	T return primary	°C	22	22	22	21	21	20	20	19
	V primary	m³/h	5.69	7.28	9.81	11.08	4.90	6.24	8.46	9.57
	Q max.	kW	280	360	490	560	280	360	490	560
	V secondary	m³/h	6.07	7.80	10.62	12.14	6.07	7.80	10.62	12.14
50/15 °C	T return primary	°C	25	25	24	24	23	23	22	22
	V primary	m³/h	5.30	6.74	9.14	10.29	4.52	5.76	7.82	8.83
	Q max.	kW	245	315	430	490	245	315	430	490
	V secondary	m³/h	6.07	7.80	10.65	12.14	6.07	7.80	10.65	12.14
50/20 °C	T return primary	°C	27	26	27	26	26	26	25	25
	V primary	m³/h	4.84	6.00	8.38	9.43	4.12	5.26	7.16	8.07
	Q max.	kW	210	270	370	420	210	270	370	420
	V secondary	m³/h	6.07	7.80	10.69	12.14	6.07	7.80	10.69	12.14
45/5 °C	T return primary	°C	16	16	16	15	15	14	14	13
	V primary	m³/h	4.99	6.34	8.58	9.69	4.39	5.59	7.59	8.58
	Q max.	kW	280	360	490	560	280	360	490	560
	V secondary	m³/h	6.07	7.80	10.62	12.14	6.07	7.80	10.62	12.14
45/10 °C	T return primary	°C	19	18	18	18	17	17	17	16
	V primary	m³/h	4.57	5.85	7.92	8.94	4.02	5.13	6.98	7.90
	Q max.	kW	245	315	430	490	245	315	430	490
	V secondary	m³/h	6.07	7.80	10.65	12.14	6.07	7.80	10.65	12.14
45/15 °C	T return primary	°C	21	21	21	20	20	20	20	19
	V primary	m³/h	4.15	5.30	7.24	8.15	3.64	4.66	6.37	7.18
	Q max.	kW	210	270	370	420	210	270	370	420
	V secondary	m³/h	6.07	7.80	10.69	12.14	6.07	7.80	10.69	12.14
45/20 °C	T return primary	°C	24	24	24	24	23	23	23	23
	V primary	m³/h	3.71	4.75	6.51	7.31	3.24	4.15	5.71	6.42
	Q max.	kW	175	225	310	350	175	225	310	350
	V secondary	m³/h	6.07	7.80	10.75	12.14	6.07	7.80	10.75	12.14


T return primary °C Temperature primary return
V primary m³/h Flow rate primary
 Q max. kW Output
V secondary m³/h Flow rate secondary

The specified technical data relate to the full load of the module in each case.


Residual overpressure / V domestic hot water circulation > draw-off standby

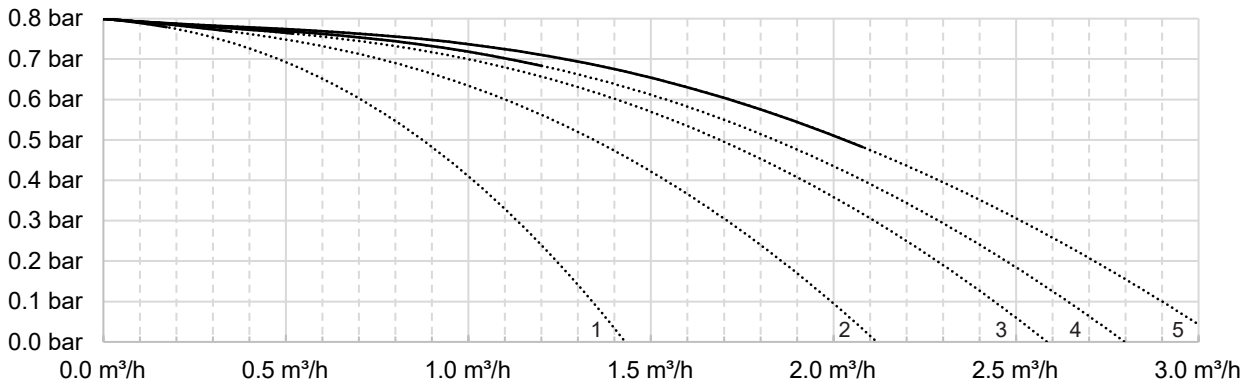


Residual overpressure / domestic hot water circulation > with draw-off Vs

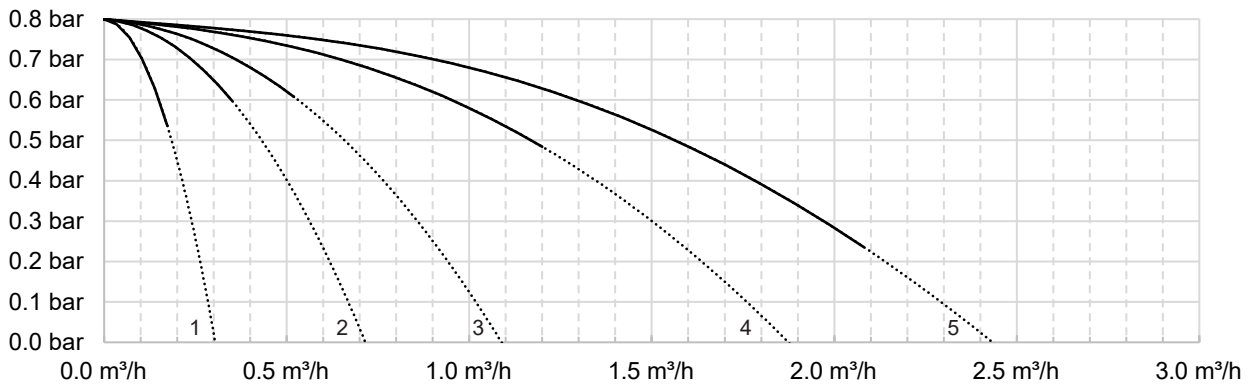

Residual overpressure / V domestic hot water circulation > draw-off standby

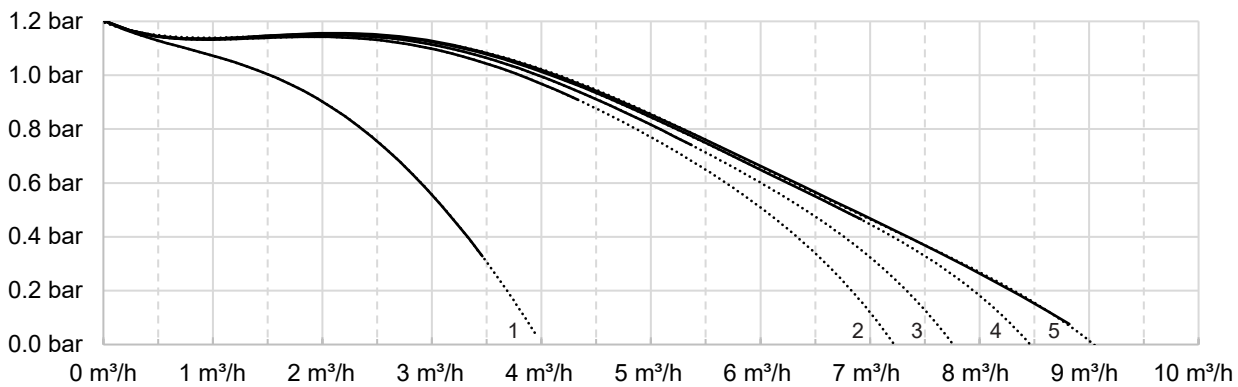


Residual overpressure / domestic hot water circulation > with draw-off Vs

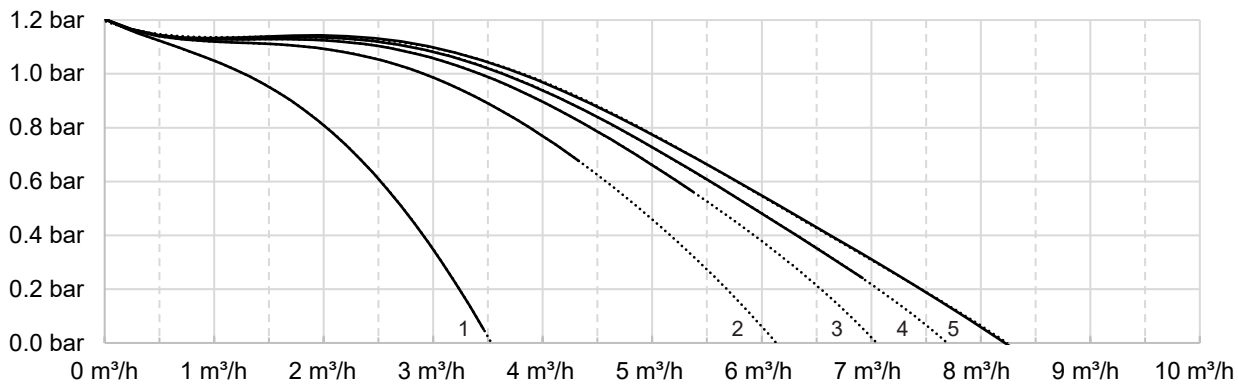


all values with open line balancing valve
dotted lines = values above nominal performance range


$\Delta P / V$ max / cold water > domestic hot water

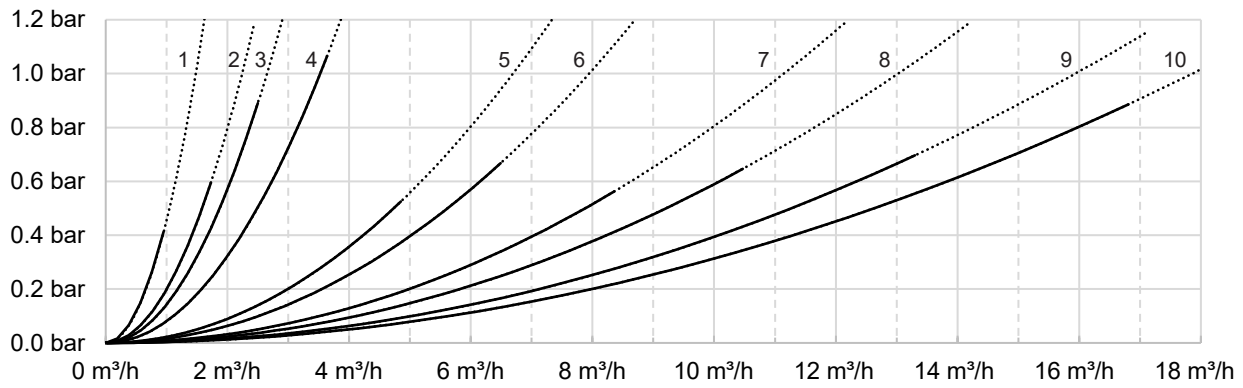

Residual overpressure / charging circuit flow HT

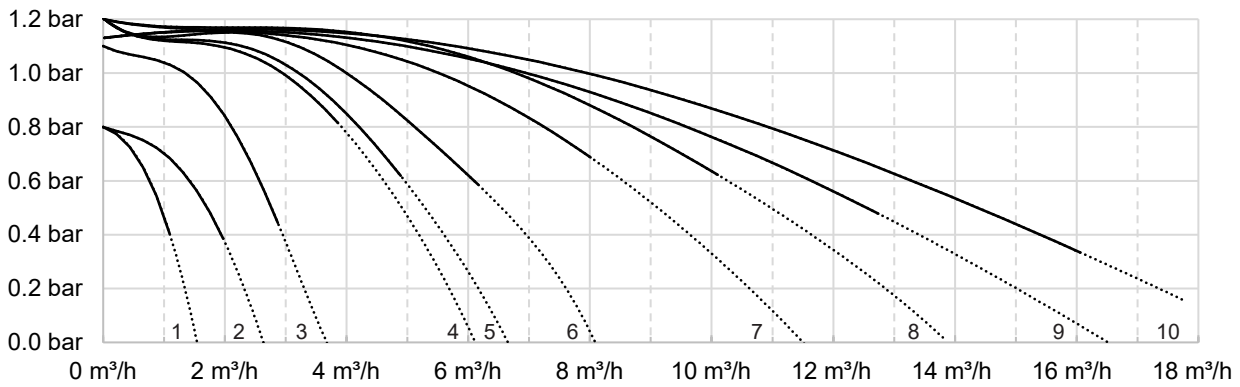



Residual overpressure / charging circuit flow LT

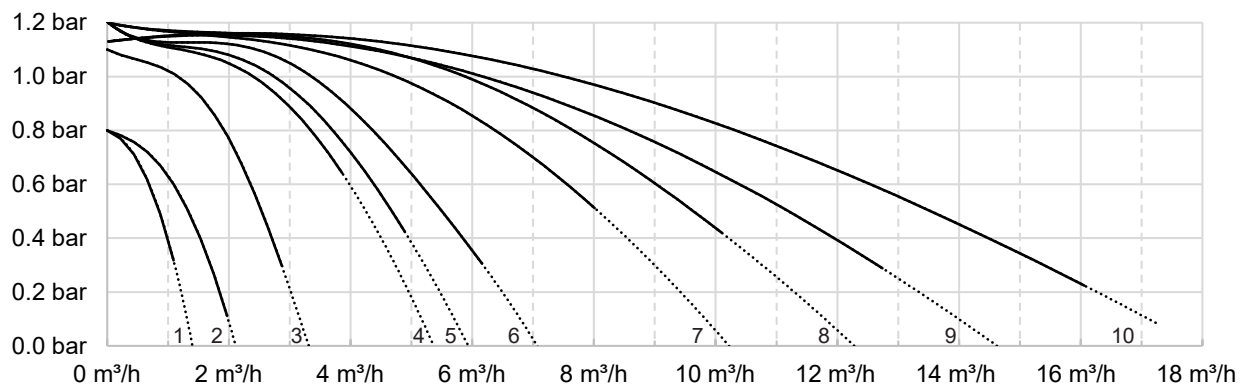


all values with open line balancing valve
dotted lines = values above nominal performance range

Charging module TransTherm® aqua FS (7-10 to 7-50)
(Dimensions in mm)

FS (7-10) approx. 1500
 FS (7-16), (7-20), (7-30) approx. 1550
 FS (7-40) approx. 1650
 FS (7-50) approx. 1750

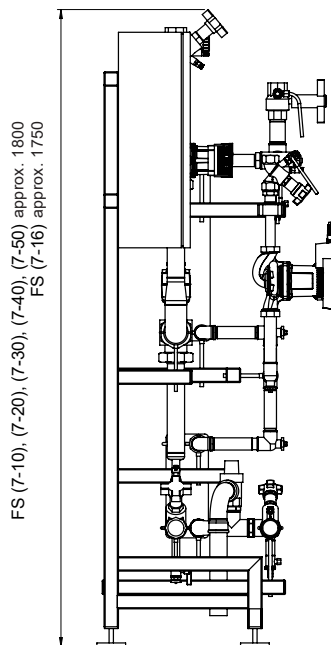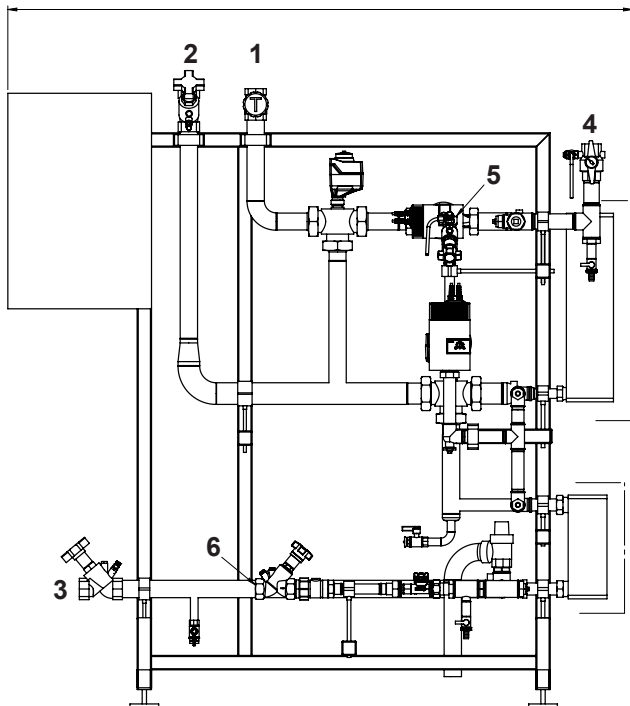

FS (7-10), (7-16), (7-20), (7-30), (7-40) approx. 650
 FS (7-50) approx. 700


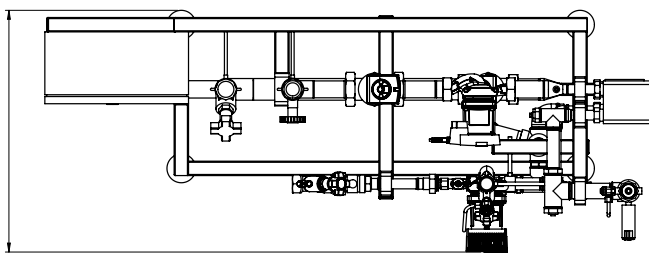


	(7-10)	(7-16)	(7-20) (7-30)	(7-40)	(7-50)
1 Charging circuit FL	DN 20, Rp ¾"	DN 25, Rp 1"	DN 32, Rp 1¼"	DN 32, Rp 1¼"	DN 40, Rp 1½"
2 Charging circuit HT RT	DN 20, Rp ¾"	DN 25, Rp 1"	DN 32, Rp 1¼"	DN 32, Rp 1¼"	DN 40, Rp 1½"
3 Charging circuit LT RT	DN 20, Rp ¾"	DN 25, Rp 1"	DN 32, Rp 1¼"	DN 32, Rp 1¼"	DN 40, Rp 1½"
4 Domestic hot water	DN 20, Rp ¾"	DN 20, Rp ¾"	DN 25, Rp 1"	DN 32, Rp 1¼"	DN 32, Rp 1¼"
5 Domestic hot water circulation	DN 20, Rp ¾"	DN 20, Rp ¾"	DN 20, Rp ¾"	DN 25, Rp 1"	DN 25, Rp 1"
6 Cold water	DN 20, Rp ¾"	DN 20, Rp ¾"	DN 25, Rp 1"	DN 32, Rp 1¼"	DN 32, Rp 1¼"


Rp = Internal thread

Charging module TransTherm® aqua FS (7-60 to 7-90)
(Dimensions in mm)

FS (7-60) approx. 2050
 FS (7-70) approx. 2100
 FS (7-80) approx. 2400
 FS (7-90) approx. 2450

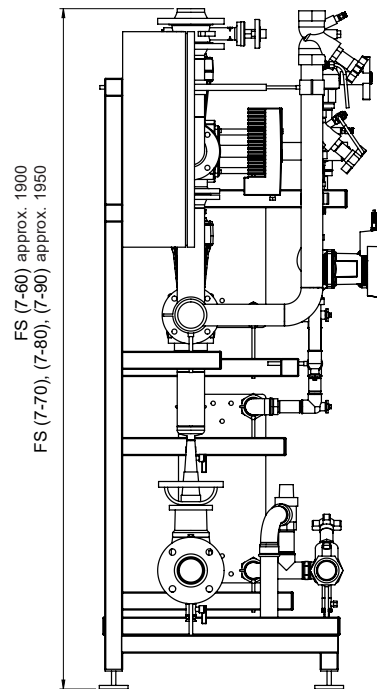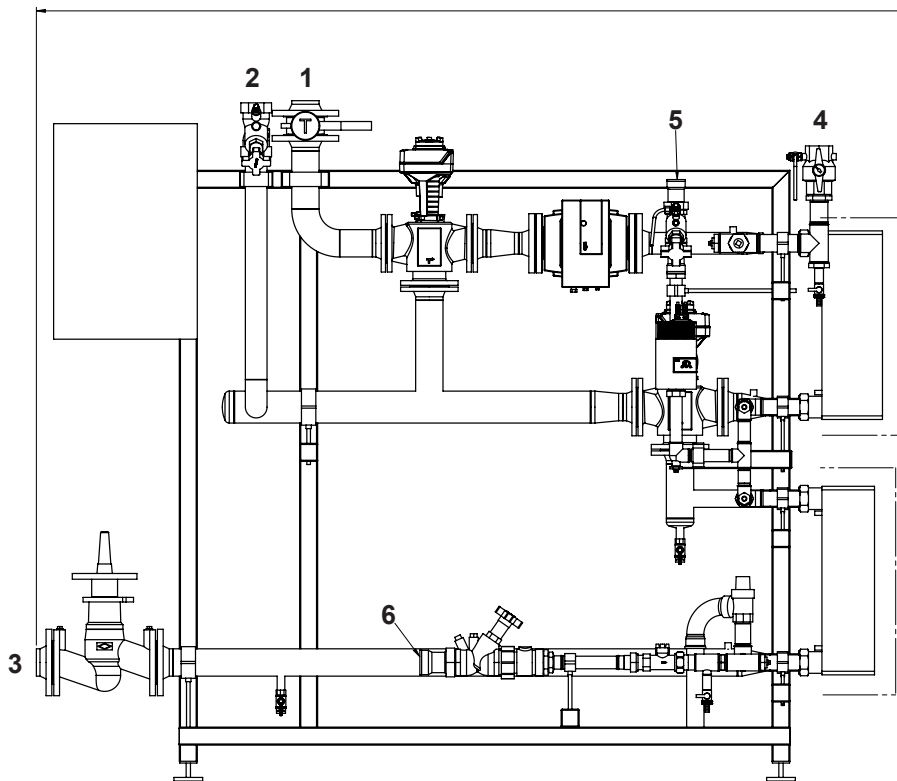


FS (7-60) approx. 1900
 FS (7-70), (7-80), (7-90) approx. 1950

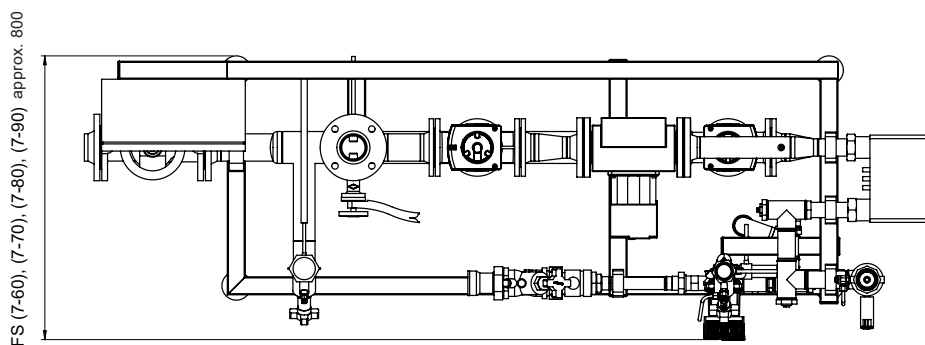

FS (7-60), (7-70), (7-80), (7-90) approx. 800

	(7-60) (7-70)	(7-80) (7-90)
1 Charging circuit FL	DN 50, Rp 2" (IT)	DN 65, Rp 2½" (IT)
2 Charging circuit HT RT	DN 50, Rp 2" (IT)	DN 65, Rp 2½" (IT)
3 Charging circuit LT RT	DN 50, Rp 2" (IT)	DN 65, Rp 2½" (IT)
4 Domestic hot water	DN 40, Rp 1½" (IT)	DN 50, Rp 2" (IT)
5 Domestic hot water circulation	DN 32, Rp 1¼" (IT)	DN 40, Rp 1½" (IT)
6 Cold water	DN 40, Rp 1½" (IT)	DN 50, Rp 2" (IT)

Water heating
TransTherm® aqua FS

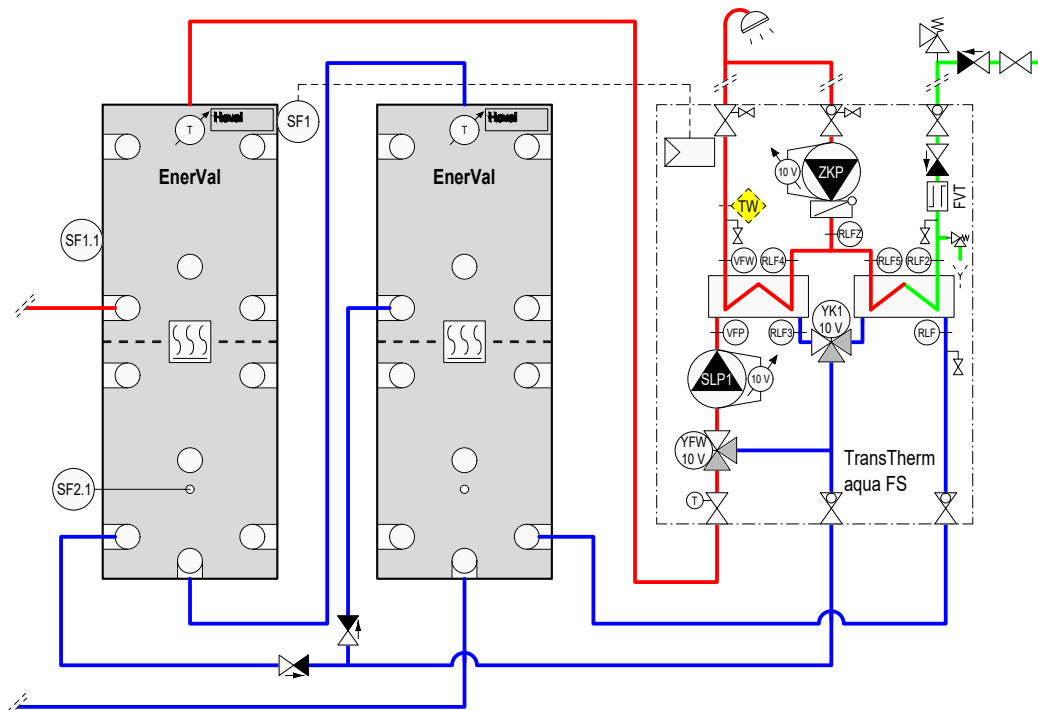

- TTE-FW Basic module district heating/fresh water
- TW Temperature monitor (if required)
- VFW Flow sensor DHW
- RLF4 Return sensor DHW
- RLF5 Return sensor DHW
- RLF2 Return sensor cold water
- RLFZ Return sensor circulation
- SF1 Calorifier sensor
- SF1.1 Calorifier sensor (heat generator)
- SF2.1 Calorifier sensor (heat generator)
- ZKP Circulation sensor
- FVT Flow rate sensor
- VFP Flow sensor primary
- RLF3 Return sensor HT primary
- RLF Return sensor LT primary
- SLP1 Calorifier charging pump
- YFW Three-way valve with drive (mixing valve)
- YK1 Three-way valve with drive (distributor valve)
- ZKP Circulating pump

Option
BM TopTronic® E control module

Notice

A safety valve (6 bar) must be installed in the cold water line.
The fresh water module is already protected with a safety valve (10 bar).